

# NimbRo TeenSize 2009 Team Description

Sven Behnke, Jörg Stückler, and Michael Schreiber


Rheinische Friedrich-Wilhelms-Universität Bonn  
Computer Science Institute VI: Autonomous Intelligent Systems  
Römerstr. 164, 53117 Bonn, Germany  
{ behnke | stueckler | schreiber } @ ais.uni-bonn.de  
<http://www.NimbRo.net>

**Abstract.** This document describes the RoboCup Humanoid League team NimbRo TeenSize of Rheinische Friedrich-Wilhelms-Universität Bonn, Germany, as required by the qualification procedure for the competition to be held in Graz in July 2009.


Our team uses self-constructed robots for playing soccer. The paper describes the mechanical and electrical design of the robots. It also covers the software used for perception and behavior control.

## 1 Introduction

The project NimbRo – Learning Humanoid Robots moved in 2008 from Freiburg to Bonn. Our TeenSize team participated with success at last year’s RoboCup Humanoid League competition in Suzhou. The robots won the third place in the dribble and kick competition and came in second in the technical challenges. Figure 1 shows the semi final of dribble and kick, where our robots met Team Osaka. The exciting game was draw after regular five kicks. It was still draw after three extra kicks. Team Osaka won 7:6 after the game continued with sudden death kicks.

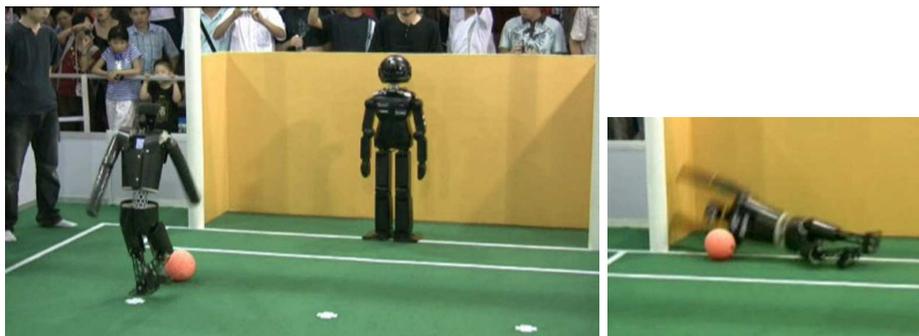

**Fig. 1.** RoboCup 2008 TeenSize semi final NimbRo vs. Team Osaka. The NimbRo robot Bodo kicked reliably (left) and jumped quickly to the ground as goalie (right).

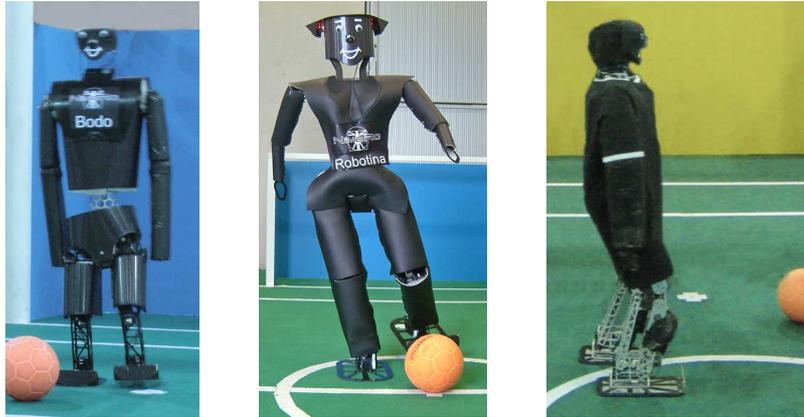

**Fig. 2.** Nimbro TeenSize robots Bodo, Robotina, and Dynaped.

For 2009, we will continue to use the Nimbro TeenSize robots Bodo and Robotina. We will also use the new robot Dynaped. We continuously improve the computer vision and behavior control software.

This document describes the current state of the project as well as the intended development for the RoboCup 2009 competitions. It is organized as follows. In the next section, we describe the mechanical and electrical design of the robots. The perception of the internal robot state and the situation on the field is covered in Sec. 3. The generation of soccer behaviors in a hierarchy of agents and time-scales is explained in Sec. 4.

## 2 Mechanical and Electrical Design

Fig. 2 shows our three TeenSize robots Bodo, Robotina, and Dynaped. As can be seen, the robots have human-like proportions. Their mechanical design focused on simplicity, robustness, and weight reduction.

Bodo is 103cm tall and has a weight of about 5kg. Robotina has a height of 122cm and weighs 9kg. Dynaped is 105cm tall, and weighs 7kg.

Bodo is driven by 14 Dynamixel actuators: 6 per leg and 1 in each arm. For all leg joints, except hip yaw, we use large RX-64 actuators (116g, 64kg-cm). All other joints are driven by smaller DX-117 actuators (66g, 37kg-cm).

Robotina's 23 DOF are driven by a total of 35 Dynamixel actuators. She has 6DOF legs, 4DOF arms, and a 3DOF trunk. All joints in the legs and the trunk, except for the yaw axes, are driven by two parallel actuators. The actuators are coupled in a master-slave configuration. This doubles the torque and lowers operating temperatures. The master-slave pair of actuators has the same interface as the single actuators used for all other joints. Dynamixel RX-64 actuators are used in the legs and DX-117 actuators are used in the trunk and in the arms. The ankle, hip, and trunk yaw/roll axes are reinforced by external 2:1/3:1 spur gears, respectively, resulting in a holding torque of 384kg-cm (39Nm)

in the ankle and hip roll joints. The knee is not reduced with an external spur gear, because it needs to move quickly. Instead, a torsional spring is added in parallel to the knee actuators. This spring supports stretching the knee. It is designed to compensate for the weight of the robot when it is standing with partially bent knees.

Dynaped has 12DOF: 5DOF per leg and 1 DOF per arm. Its legs use a parallel kinematics, which keeps the hip parallel to the ground in saggittal direction. The joints are driven by master-slave pairs of EX-106 actuators.

Bodo and Dynaped have a mechanical fuse between the hip and the spine, which allows the robots to jump quickly to the ground as a goalie.

The skeleton of the robots is constructed from aluminum extrusions with rectangular tube cross section. In order to reduce weight, we removed all material not necessary for stability. The feet and other flat parts are made from sheets of carbon composite material. For protection, we included a layer of foal between the outer shell of the robots and their skeleton.

The robots are controlled by an UMPC, a Sony Vaio UX, which features an Intel 1.33GHz ULV Core Solo Processor, 1GB RAM, 32GB SSD, a touch-sensitive display, 802.11a/b/g WLAN, and a USB2.0 interface. Three IDS uEye UI-1226LE industrial USB2.0 cameras with 1/3" WVGA CMOS sensor are mounted in the head. The nose is the wide-angle lens of one of these cameras. The two other cameras are located below the visible eyes. They have an overlapping field-of-view and cover together a horizontal field-of-view of about 160°.

The robots are also equipped with a HCS12X microcontroller board, which manages the detailed communication with all joints via an 1Mbaud RS-485 bus. The microcontroller also read in a dual-axis accelerometer and two gyroscopes. This board communicates with the main computer via a RS-232 serial line at 115KBaud. The robots are powered by high-current Lithium-polymer rechargeable batteries, which are located in their lower back and last for about 20min of operation.


### 3 Perception

Our robots need information about themselves and the situation on the soccer field to act successfully.

#### 3.1 Proprioception

The readings of accelerometers and gyros are fused to estimate the robot's tilt in roll and pitch direction. The gyro bias is automatically calibrated and the low-frequency components of the tilt estimated from the accelerometers are combined with the integrated turning rates to yield an estimate of the robot's attitude that is insensitive to short linear accelerations. Joint angles, speeds, and loads are also available. Temperatures and voltages are monitored to notify the user in case of overheating or low batteries.

### 3.2 Computer Vision

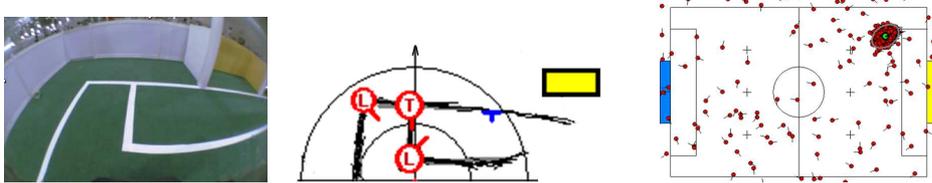

**Fig. 3.** Detected features: line corners, goalpost, and goal; particle filter localization.

We capture and process YUV images from all three cameras at an aggregated frame rate of approx. 24 fps. Each pixel is color-classified in a fast multistage process using a color look-up table. In the downsampled color-classified image we detect the ball, the goals, the poles, goal-posts, restart markers, field line features, obstacles, team mates, and opponents by color and size. We estimate distance and angle to each feature in the robot's egocentric coordinate frame by removing radial lens distortion and by inverting the projective mapping from field to image plane. For field line features at corners and T-junctions, we also estimate their orientation relative to the robot.

With limited FOV, parts of the soccer field and the dynamic world state can not be perceived directly. This knowledge has to be inferred and estimated indirectly instead. The goalkeeper, for example, must estimate its pose within the goal through localization using a limited set of visible landmarks. Also, it is valuable to distribute knowledge of the ball position among the players in a team using localization information.

The robot can not perceive its motion directly. Instead, we model its motion based on its gait target velocity. The model accounts for the high noise in its execution. Also, the distance and angle measurements to landmarks are subject to high noise, especially due to inclinations of the robot during walking.

As the goals, the poles, and the goal posts are not sufficient for our localization purposes, we use landmarks like the restart markers, field line corners, and field line T-junctions in addition. However, these landmarks are not uniquely identifiable by color and can not always be identified through geometric constraints in the image.

We estimate the robot's pose on the field by filtering uncertain motion information and landmark observations in a probabilistic way. We use a Monte Carlo localization (MCL) [3] approach, as it can represent multi-modal pose beliefs and can cope with unknown data association. In MCL, the estimate of the current pose of the robot based on previous observations and motion information,  $p(s_t | z_{1:t}, u_{1:t})$ , is represented with a set of weighted particles, as shown in Fig. 3. At each time step, the estimate is updated recursively with new motion information and landmark observations. This recursive Bayesian filter is implemented with the Sampling-Importance-Resampling method.

To handle unknown data association of unidentified landmarks in MCL, we sample the data association  $c_t$  on a per-particle basis. It indicates the ID of the landmark to which the observation  $z_t$  corresponds. For each particle, we sample the association with a likelihood proportionally to the observation likelihood for the landmark in the particle's pose  $s_t^{[i]}$ , i.e.  $c_t \sim \eta p(z_t | c_t, s_t^{[i]})$ .

The association of field line corner and T-junction observations to landmarks can be improved further. We compare the observed orientation with the expected orientation of the corners and T-junctions in each particle's point of view. By this, these landmark observations become uniquely identifiable in many situations.

## 4 Behavior Control

We control the robots using a framework that supports a hierarchy of reactive behaviors [1]. This framework allows for structured behavior engineering. Multiple layers that run on different time scales contain behaviors of different complexity. When moving up the hierarchy, the speed of sensors, behaviors, and actuators decreases. At the same time, they become more abstract. The framework forces the behavior engineers to define abstract sensors that are aggregated from faster, more basic sensors. Abstract actuators give higher-level behaviors the possibility to configure lower layers in order to eventually influence the state of the world.

The control hierarchy of our robots is arranged in an agent hierarchy, where

- multiple joints (e.g. left knee) constitute a body part (e.g. left leg),
- multiple body parts constitute a player (e.g. field player), and
- multiple players constitute a team.

In this hierarchy, we implemented:

- basic skills (e.g. omnidirectional walking, kicking, getting-up behaviors)
- soccer behaviors (e.g. searching the ball, positioning behind the ball), and
- tactics and team behaviors (e.g. role assignment, player positioning)

Further details on the implemented behaviors have been described by Behnke and Stückler [2].

## 5 Conclusion

At the time of writing, Feb 13th, 2009, we made good progress in preparation for the competition in Graz. We will continue to improve the system for RoboCup 2009. The most recent information about our team (including videos) can be found on our web pages [www.NimbRo.net](http://www.NimbRo.net).

## Acknowledgements

Funding for the project is provided by Deutsche Forschungsgemeinschaft (German Research Foundation, DFG) under grant BE 2556/2 and Rheinische Friedrich-Wilhelms-Universität Bonn.

## Team Members

Currently, the NimbRo soccer team has the following members:

- Team leader: Prof. Sven Behnke
- Staff: Jörg Stückler, Michael Schreiber, and Marcell Missura
- Students: Weichao Liu, Andreas Schmitz, Ralf Waldukat, Tobias Wilken, and Thomas Windheuser

## References

1. Sven Behnke and Raul Rojas. A hierarchy of reactive behaviors handles complexity. In *Balancing Reactivity and Social Deliberation in Multi-Agent Systems*, pages 125–136. Springer, 2001.
2. Sven Behnke and Jörg Stückler. Hierarchical reactive control for humanoid soccer robots. *International Journal of Humanoid Robots (IJHR)*, 5(3):375–396, 2008.
3. S. Thrun, W. Burgard, and D. Fox. *Probabilistic Robotics*. MIT Press, 2005.



**Fig. 4.** RoboCup 2008 dribbling challenge and third place game vs. Robo Erectus.