

# RoboCup Rescue 2016 Team Description Paper

## YILDIZ

Sırma Yavuz, M. Fatih Amasyalı, Erkan Uslu, Furkan Çakmak, Muhammet Balçılar, Nihal Altuntaş,  
and Salih Marangoz

### Info

Team Name: Yıldız  
 Team Institution: Yıldız Technical University  
 Team Leader: Sırma Yavuz  
 Team URL: <http://www.robotics.yildiz.edu.tr>  
 RoboCup Rescue 2016 TDP collection:  
<https://to-be-announced.org>

**Abstract**—This paper describes the improvements on robots, their operation and strategies developed by Team Yıldız. Since our last appearance in RoboCup Open in Germany, our team concentrated on full autonomy. As a result of experiences gained during the competition in 2015, the team especially worked on efficient navigation, mapping and victim detection strategies and developed its own algorithms. Our team decided to join this years competition with a single four wheeled robotic car. A new model of a tracked robot is also developed it will not be used during this years championship.

**Index Terms**—RoboCup Rescue, Team Description Paper, Navigation, Exploration, Mapping.

### I. INTRODUCTION

**T**TEAM Yıldız is part of the robotics research group founded within the Computer Engineering Department of Yıldız Technical University. Our group is working on mapping, autonomous navigation and image processing algorithms and developing its own autonomous mobile robots since 2007. The group is focused on developing search and rescue robots and the algorithms required in search and rescue operations. Two teams; working with real robots and with simulation environment has emerged from the research group. Both of the teams work closely to develop algorithms and join RoboCup competitions since 2011. The real robot team was not able to join the competitions every year, partly because of financial reasons, but the virtual robot team won the second place in Mexico, Netherlands and Brazil world championship. Real robot team contains one undergraduate and two graduate students apart from four academics who act as team leader and advisors. Members of the team have a strong background in programming, electronic and mechanical design. Contributing towards the production of robust and more intelligent search and rescue robots is the most important goal of the group. We are planning to use only one skid steering differential drive

Sırma Yavuz, M. Fatih Amasyalı, Erkan Uslu, Furkan Çakmak, Muhammet Balçılar, Nihal Altuntaş and Salih Marangoz are with the Department of Computer Engineering, Yıldız Technical University, Istanbul, TURKEY, e-mail: [sirma,mfatih,erkan,furkan,muhammet@ce.yildiz.edu.tr](mailto:sirma,mfatih,erkan,furkan,muhammet@ce.yildiz.edu.tr), [salih.marangoz@hotmail.com](mailto:salih.marangoz@hotmail.com)

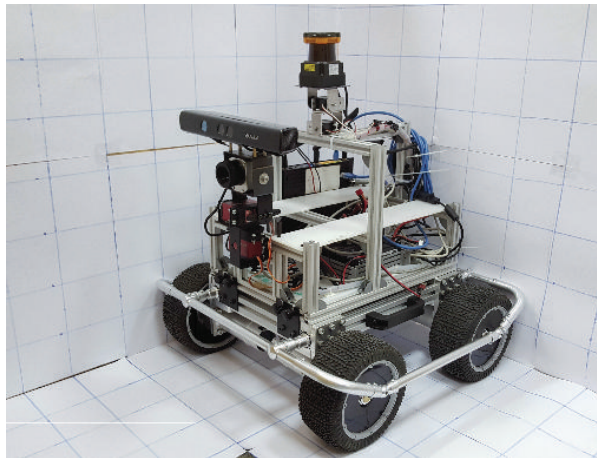


Fig. 1. Photo of the robot

robot during this years competition. Our robot is developed for autonomous navigation. This is an improved model of our previous robot. For the competition, our original model gone under some modifications; such as resizing, incorporating new sensors and changing the location and number of sensors. Final photo of the robot is shown in Figure 1.

#### A. Improvements over Previous Contributions

Our team previously participated at RoboCup Rescue. As a result of our experiences we first migrated to ROS and improved our mechanical design, electronic framework and sensors are also updated during time. Migrating to ROS and aiming only full autonomy has changed the mechanisms considerably. In terms of mechanics, we have decided to use only wheeled models and no tracked robot for this year. We have experimented on passive and active suspension systems and decided on a simpler suspension which will allow us to cover most of the area without experiencing too many mechanical problems. ROS allowed us to make use of drivers for Arduino platform. Now we use Arduino platform to receive input from our sensors and to control the motors. We have also started to use Kinect sensor for victim identification, which has libraries available for ROS. In terms of navigation strategies, changes in sensors and full autonomy made our algorithm more reliable and faster. We have also built an arena very similar to the competition in our laboratory to test the algorithms.



Fig. 2. The drawings and the picture of the robot platform.

## II. SYSTEM DESCRIPTION

Only one fully autonomous robot will be used per mission. It will try to cover the most of the area using the SLAM and exploration algorithms developed by our team. SLAM algorithms relying on sensor data and will generate the map of the area automatically. Victim detection is planned to be fully autonomous as well. The robot will only send the necessary information to the operators computer for him to annotate and print the victim information and the map.

### A. Hardware

As the robot is skid steering differential drive robot, whole physical kinematics modeling is hard to reach as the parameters depend heavily on environment variables. Instead kinematics parametrization is achieved according to experimental kinematics. This way required rotational radius, angular velocities and linear velocities can be realized without deep physical modeling.

The robot is equipped with different sensors including an RGB-D camera, one LRFs and an inertia measurement unit (IMU) that may be used for exploration and mapping purposes. Additionally, thermal camera, microphone and carbon dioxide sensors are used to detect the victims and to determine their states.

LRF is the only required sensor to produce 2D map of the environment. The inertia measurement unit IMU is also utilized to control and stabilize the LRF. LRF is fixed to a base on top of a pan/tilt unit and the angles of the unit are controlled to be equal to the negative of the angles measured by the IMU. As a result, the LRF direction is stabilized to always be level and pointing in the same direction. This eliminates the requirement of identifying and removing any noisy or invalid range scans within the algorithm.

Initial drawings of the robot showing the placement of li-po batteries and the on board computer, are given in 2.

Final appearance of the robot is as given in Figure 1. Also important components of the robot and operator station specifications are given in Table II and Table I, Appendix C.

### B. Software

All relevant software packages used by the team is listed in Table III, given in Appendix C.

### C. Map Generation

Since our last appearance in the competition, we have started to use ROS frame-work which allowed us to use various

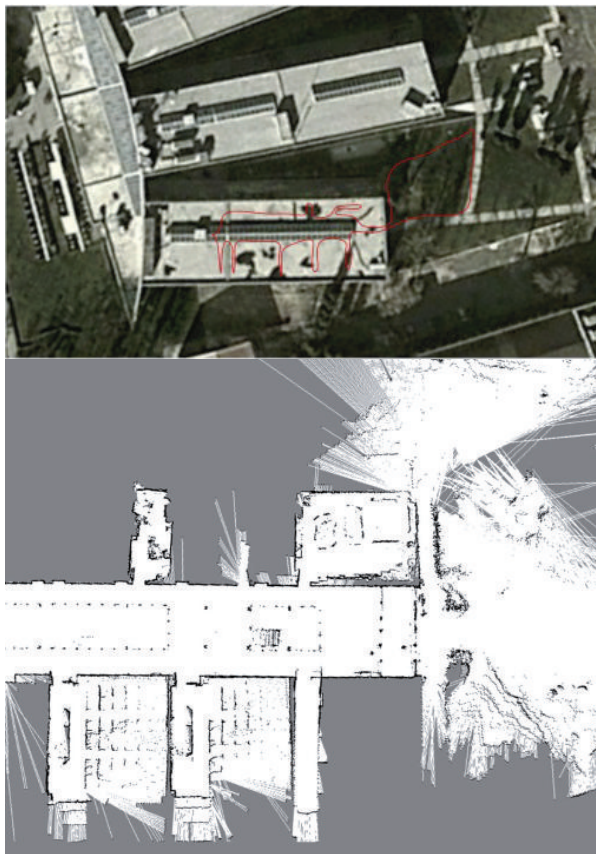


Fig. 3. Sample sensor-based map for the faculty building.

tools and libraries. Recently we have developed new R-SLAM Mapping software to generate a 2-D map of the environment. We will be using our own navigation software which requires data from both victim detection and mapping algorithms. Operator can follow the landmarks and victims found by the algorithm on the screen. We will extend the software, to provide an information sheet for each victim found, to allow operator to edit the victim information. Operator will be able to print the victim information and the final map using the print button on the software.

We are able to produce reliable sensor-based maps using our own R-SLAM algorithms, and it is fully adapted into ROS. Sample sensor-based maps generated in our faculty building and in laboratory environment, using R-SLAM are given in Figure 3 and Figure 4.

Our previous work on SLAM algorithms primarily rely on LRF and encoder data for mapping and localization. Since the competition site is more complicated, including ramps, stairs or holes on the walls we are currently incorporating IMU and Kinect data into our software. In our application we aim the operator to add few annotations to the information sheet provided by the software and not to interfere with automatic map generation at all.

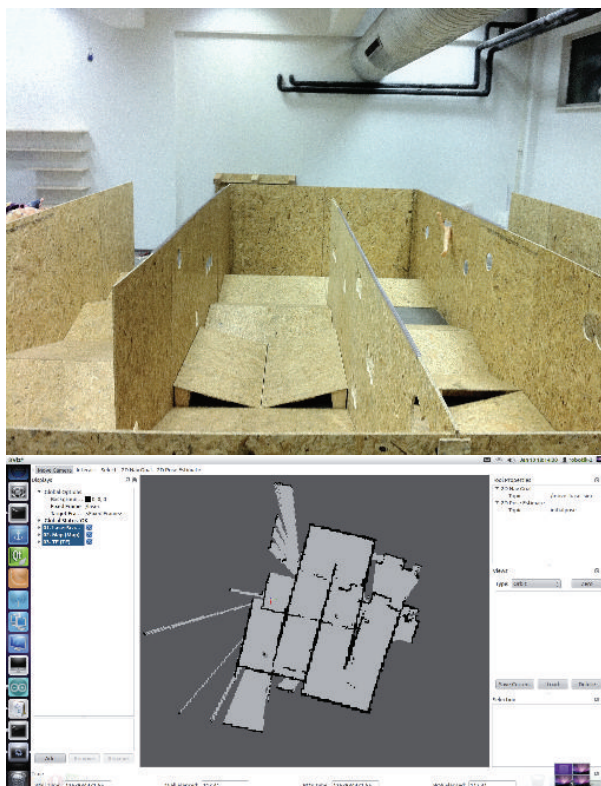


Fig. 4. Sample sensor-based map for the area constructed in the lab.

#### D. Navigation and Localization

Exploration method of the robot is established on frontier based approach and potential target detection and navigation studies [1]. Our exploration strategy is based on finding the frontiers having the greatest potential. Potential frontiers are defined proximity of the unexplored neighbor grids. This definition depends on the distance of the paths which is calculated with A\* algorithm between robot and its target. Minimum and optional path is selected and robot is navigated during this selected path. Navigation is based on global and local planners. Global planner determines the path according to Dijkstra algorithm. Local planner uses the dynamic window approach [2] [3].

Sensors used for navigation and localization are listed as follows:

- Inertia Measurement Unit (IMU): It provides 3D orientation, acceleration, 3D rate of turn and 3D earth-magnetic field data.
- Laser Range Finder (LRF): The field-of-view for this sensor is 240 degrees and the angular resolution is 0.36 degrees. It can measure distances up to 30 meters.
- Ultrasonic Range Finders: Although these sensors are not crucial for map-ping or localization, they are used to sense any obstacles close to the ground and are not detectable by LRF.
- RGB-D Camera (Kinect): Our navigation algorithm uses



Fig. 5. The results of the developed system (left) QR-code is marked by blue dot while the hole is pointed out by red one and (right) black/white image obtained by medianization in the first step of hole detection.

Kinect data to head towards the possible victims. Although, the Kinect data is not originally used as a part of the localization software, we intent to use it to correct the IMU data in future to increase the reliability in real disaster areas.

#### E. Victim Detection

Main sensors used for victim detection are as follows;

**RGB-D Camera (Kinect):** We primarily rely on RGB-D data to identify any possible victims. While depth information provides information to identify possible victims, RGB data is used to confirm the presence of victims. **Thermal Array Sensor:** Measures the absolute temperature of 8 adjacent points in its field-of-view simultaneously. Number of sensors is located on the robot at different heights. **CO2 Sensor:** It is used to check the breathing for the victim found. **Microphone and speaker:** These are used to detect the sound of the victim.

The holes located in different heights on the walls constructing the competition area are possible places for victims. In order to reduce computational load of complex image processing algorithms for victim detection, we first use Kinect depth data to identify possible victim locations by detecting the holes. Two steps are used for hole detection. First, a kind of median filter that is developed by our team is applied to remove noise and convert the greyscale depth data into black/white image as seen in Figure 5. At the second step, OpenCV library is used to find segmented hole location.

Alongside the hole and depth detection process, RGB images are used to check if there is a victim in the hole. For visual victim detection, DPM (Deformable Part Models) approach is used [4]. Two of the sample results obtained in our laboratory is shown in Figure 6.

#### F. Communication

There are two access points in our system, one on the robot side and the other on the operator station. These access points support 802.11a/n and 802.11g/n; how-ever we plan to use 802.11g/n to communicate between our main robot and the operator station. The computer used on our robots supports 802.11a/n and 802.11g/n will be connected to the access point via Ethernet cable. General setup of our system is shown in Figure 7. The wireless communication is between the access points require a selectable 802.11a/n or 802.11g/n band.





Fig. 6. Victim detection using DPM.

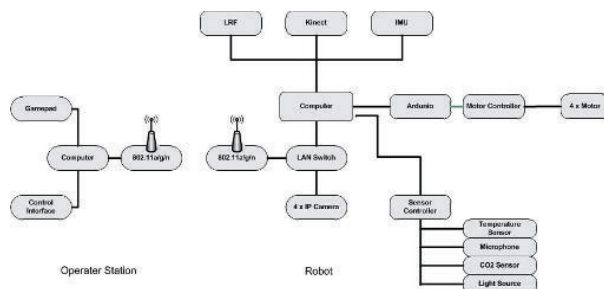


Fig. 7. The general setup of the system.

### G. Human-Robot Interface

Only one fully autonomous robot will be used per mission. It will try to cover the most of the area using the SLAM and exploration algorithms developed by our team. SLAM algorithms relying on sensor data and will generate the map of the area automatically. Victim detection is planned to be fully autonomous as well. The robot will only send the necessary information to the operators computer for him to annotate and print the victim information and the map. Robot control interface consists of one form with three tab pages, namely Connections, Sensors and Visual Elements. Initiation or connection tab page shown in Figure 8 is divided to two parts; left side of the page is simulated as an external terminal capable of executing general Linux or specific ROS queries and the right side of the page is dedicated to ROS connections containing general startup configuration.

Sensors tab page is shown in Figure 9. On the left side of this page IMU, Ultra-sonic and Carbon dioxide sensor values

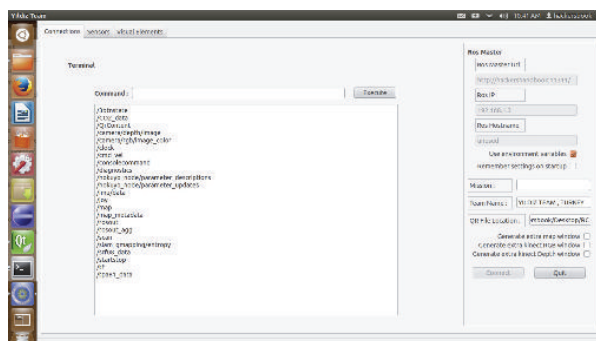


Fig. 8. Operator Interface Initiation.

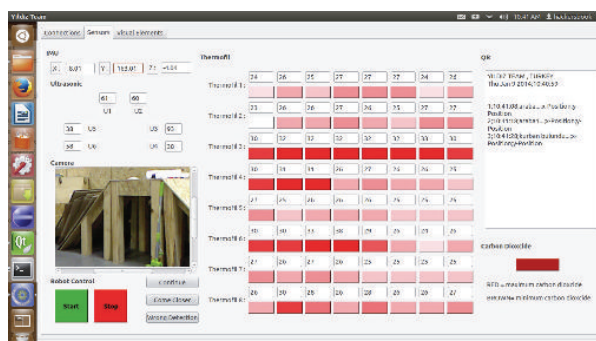


Fig. 9. Sensor value tracking.

are shared part by part in the diagonal corners and also RGB camera view and basic robot management command group is presented. QR code details and retrieval information in QR codes is extracted and shared in right side of the page.

The heat map is used to visualize the temperature information which is represented with colors changing between red and white. Thermopile sensor values can be seen on the heat map as well. Heat map source will be replaced with thermal camera by the competition. Finally, RGB-depth camera view and Mapping information are shown in visual elements tab page shown in Figure 10. Since all algorithms will run on the robots and only the automatically generated maps and video streams will be sent to the operators computer. Using the interface, where operator monitors the sensor based map generated by the SLAM algorithm and may eliminate points he considered to be faulty, he will also see the position of the robot as calculated by the SLAM algorithm. Mapping visual is generated by computing laser scan data although camera views are directly shared using raw camera data which are received from the network via ROS topics. System history is logged and shared in this tab. Rviz and OpenNI initiation can be done using application shift buttons. Operator will be using this tab to watch the video stream and draw a map. Victims will be marked here as well.

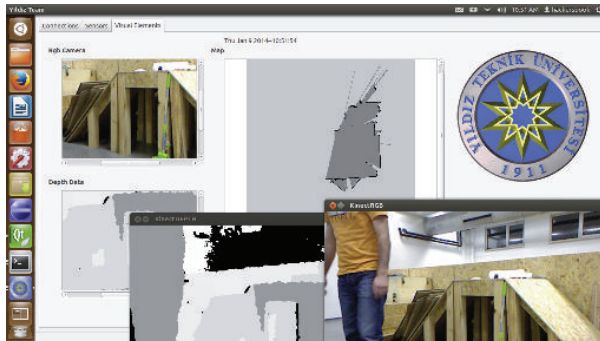


Fig. 10. Visual elements with external video streams.

### III. APPLICATION

#### A. Set-up and Break-Down

Since we primarily plan to run for autonomous league, we have not changed the structure of the operator station too much. An aluminum wheeled case will be used to carry all necessary items for the operator station. The station will be powered up and powered down with one button. The operation case contains one laptop, one lcd monitor, one access point and a power unit. To carry the robot we have another movable chassis with wheels, it is constructed according to the size of our robot. Although other team members will assist the operator to carry the operation case we aim to have only one operator to set up and break-down the operator station within 10 minutes. Two people will be responsible of carrying the robots inside and outside the competition arena.

#### B. Mission Strategy

We are planning to use only one skid steering differential drive robot during this years competition. Our robot is developed for autonomous navigation. Although a new model of a tracked robot is also developed it will not be used during this years championship. We plan to test our algorithms thoroughly for this year and apply them into the new model afterwards.

#### C. Experiments

To test our robot and algorithms we have built a test area in our laboratory. To construct standard test methods we have utilized the ideas discussed in [5], [6], [7], [8], [9], [10], [11]. These tests and validations are also required in our ongoing projects which are supported by the government agencies and our University. Some details of these experiments are given in previous sections and in our publications [2].

#### D. Application in the Field

On a real disaster site, the main advantage of our system is being able to move autonomously. Communication would arise as an important problem in most disaster sites. If the robot is not able to get back where it has started, the information it gathered inside the ruins becomes completely useless. Although we still have a long way to go in terms of mechanics,

the strongest feature of our system is its autonomy. In terms of mechanical design, we are working on a design that can cope with rough terrain better, besides having financial problems we will probably need much more work to be successful on a real and completely unknown disaster site.

### IV. CONCLUSION

After our first competition the main conclusion we draw was we had to see it to really understand it. It was a great experience in many ways:

- We realized that very simple mistakes or not having enough training time may finish the run at the first moment,
- We had a chance to get to know each other far more better under the pressure and tried to establish the team accordingly,
- We realized that we have aimed much more than what we can achieve for the first time; trying to have different kind of robots caused us not being good enough at anything. For that reason, this time we have decided to concentrate on full autonomy and work on other aspects such as manipulation in future. Going step by step is proven to be important.
- We have had the disadvantage of working on the algorithms up to the last moment and did not run the robots on areas similar to the competition site. As a result, on the set-up day we realized that our wheeled-robot was too close to the ground which prevents it to move even in a simple ramp. Also for the tracked robot, we only realized an electronic design mistake after burning few motor controller cards, when robot got stuck. Now we have an arena where we constantly try our robots.

### APPENDIX A

#### TEAM MEMBERS AND THEIR CONTRIBUTIONS

The list of the team members and their main responsibilities are as follows:

- **Sırma Yavuz** Team leader, responsible of mechanical design, electronics and SLAM software development
- **M. Fatih Amasyali** Advisor, responsible of victim detection and image processing software development
- **Erkan Uslu** Electronics, controller programming
- **Muhammet Balcılar** SLAM software development, Exploration Algorithms
- **Furkan Çakmak** Navigation Algorithm, ROS, Control algorithms
- **Nihal Altuntaş** Image processing software, victim detection, 3D mapping
- **Salih Marangoz** Image processing software, victim detection

### APPENDIX B

#### CAD DRAWINGS

Some drawings of the robot are given in Figure 11.



Fig. 11. Drawings of the Robot.

TABLE I  
OPERATOR STATION

Attribute	Value
Name	YildizOp
System Weight	3.5kg
Weight including transportation case	6.3kg
Transportation size	0.5 x 0.5 x 0.3 m
Typical operation size	0.5 x 0.5 x 0.5 m
Unpack and assembly time	1 min
Startup time (off to full operation)	1 min
Power consumption (idle/ typical/ max)	60 / 80 / 90 W
Battery endurance (idle/ normal/ heavy load)	3 / 1 / 0.5 h
Cost	\$3000

APPENDIX C  
LISTS

## A. Systems List

For the Operator Station, specifications are given in Table I.

## B. Hardware Components List

Main components of our Robot used by the team is listed in Table II.

## C. Software List

Software packages used by the team is listed in Table III.

## ACKNOWLEDGMENT

This research has been supported by Turkish Scientific and Technical Research Council (TUBITAK), EEEAG-113E212 and Yıldız Technical University Scientific Research Projects Coordination Department (Project Numbers: 2015-04-01-GEP01 and 2015-04-01-KAP01).

TABLE II  
HARWARE COMPONENT LIST

Part	Brand & Model	Num.
Robot Base	Custom Made	1
Electronics for motor control and sensor readings	Arduino Uno, Motor Driver Shield	2
Motors	Maxon Motor	4
IMU	Microstrain 3DM-GX2	1
LRF- Laser Range Finder	UTM-30LX	1
Access Point	TPLink	1
Kinect RGB-D Camera	Microsoft Kinect v1	1
Computer	Toshiba Satellite	1
Thermal Camera	Optris Thermal Camera	1
Battery	Li-Po	4
<b>Total Price</b>		<b>\$30000</b>

TABLE III  
SOFTWARE LIST

Name	Version	License	Usage
Ubuntu	14.04	open	
ROS	Indigo	BSD	
OpenCV [12], [13]	2.4.8	BSD	Victim detection
OpenCV [14]	2.4.8	BSD	Hazmat detection
SLAM	0.1	Closed Source	2D SLAM
Proprietary GUI from Yildiz U.	0.7	Closed Source	Operator Station

## REFERENCES

- [1] A. Visser and A. S. Bayu, "Including communication success in the estimation of information gain for multi-robot exploration," in *Proceedings of the 6th International Symposium on Modeling and Optimization in Mobile, Ad Hoc, and Wireless Networks*, 2008.
- [2] E. Uslu, F. Çakmak, M. Balçılar, A. Akıncı, M. F. Amasyalı, and S. Yavuz, "Implementation of frontier-based exploration algorithm for an autonomous robot," in *International Symposium on Innovations in Intelligent Systems and Applications*, September 2015.
- [3] D. Fox, W. Burgard, and S. Thrun, "The dynamic window approach to collision avoidance," in *Proceedings of the IEEE/RSJ International Conference on Intelligent Robots and Systems*. IEEE, 1996.
- [4] P. Felzenszwalb, D. McAllester, and D. Ramanan, "A discriminatively trained, multiscale, deformable part model," in *Computer Vision and Pattern Recognition (CVPR)*. IEEE, 2008.
- [5] R. Sheh, T. Kimura, E. Mihankhah, J. Pellenz, S. Schwertfeger, and J. Suthakorn, "The robocuprescue robot league: Guiding robots towards fieldable capabilities," in *Advanced Robotics and its Social Impacts (ARSO), 2011 IEEE Workshop on*. IEEE, 2011, pp. 31–34.
- [6] S. Kohlbrecher, K. Petersen, G. Steinbauer, J. Maurer, P. Lepej, S. Uran, R. Ventura, C. Dornhege, A. Hertle, R. Sheh, and J. Pellenz, "Community-driven development of standard software modules for search and rescue robots," in *Proceedings of the 10th IEEE International Symposium on Safety Security and Rescue Robotics (SSRR 2012)*, 2012.
- [7] J. Pellenz and D. Paulus, "Mapping and Map Scoring at the RoboCupRescue Competition," Quantitative Performance Evaluation of Navigation Solutions for Mobile Robots (RSS 2008, Workshop CD), 2008.
- [8] R. Sheh, A. Jacoff, A.-M. Virts, T. Kimura, J. Pellenz, S. Schwertfeger, and J. Suthakorn, "Advancing the state of urban search and rescue robotics through the robocuprescue robot league competition," *8th International Conference on Field and Service Robotics*, 2012.
- [9] A. Jacoff, R. Sheh, A.-M. Virts, T. Kimura, J. Pellenz, S. Schwertfeger, and J. Suthakorn, "Using competitions to advance the development of standard test methods for response robots," in *Proceedings of the Workshop on Performance Metrics for Intelligent Systems*. ACM, 2012, pp. 182–189.
- [10] S. Schwertfeger, A. Jacoff, J. Pellenz, and A. Birk, "Using a fiducial map metric for assessing map quality in the context of robocup rescue," in *IEEE International Symposium on Safety, Security, and Rescue Robotics (SSRR)*. IEEE Press, 2011, pp. 1–6.
- [11] K. Pathak, A. Birk, S. Schwertfeger, I. Delchev, and S. Markov, "Fully autonomous operations of a jacobs rugbot in the robocup rescue robot league 2006," in *International Workshop on Safety, Security, and Rescue Robotics (SSRR)*. IEEE Press, 2007.
- [12] P. Viola and M. Jones, "Rapid object detection using a boosted cascade of simple features," in *Computer Vision and Pattern Recognition, 2001. CVPR 2001. Proceedings of the 2001 IEEE Computer Society Conference on*, vol. 1, 2001, pp. I-511–I-518 vol.1.
- [13] R. Lienhart and J. Maydt, "An extended set of haar-like features for rapid object detection," in *Image Processing, 2002. Proceedings. 2002 International Conference on*, vol. 1, 2002, pp. I-900–I-903 vol.1.
- [14] S. Liao, X. Zhu, Z. Lei, L. Zhang, and S. Li, "Learning multi-scale block local binary patterns for face recognition," in *Advances in Biometrics*, ser. Lecture Notes in Computer Science, S.-W. Lee and S. Li, Eds. Springer Berlin Heidelberg, 2007, vol. 4642, pp. 828–837. [Online]. Available: [http://dx.doi.org/10.1007/978-3-540-74549-5\\_87](http://dx.doi.org/10.1007/978-3-540-74549-5_87)